

Handpiece Lubrication Machine

Power: 50W
Voltage: AC 220V/50Hz
Working pressure: 0.3-0.6Mpa
Air flow: 60L/min
Packing Size: 37*28*30cm
Gross Weight: 7.2KG




Ultrasonic Cleaner

Tank capacity: 2500ml
Tank size: 24.5*15*7.5cm
Product size: 32*23.5*20.5cm
Packing size: 35*28.5*24cm
GW/NW: 3.5/3.1KG



Ultrasonic Cleaner

Power: AC 100-240V 50/60 Hz
Tank Capacity: 6000ml
Tank size: 33*20*10cm
Product size: 56*31*23cm
Packing Size: 58*37*29cm
GW/NW: 8.6/7.4KG

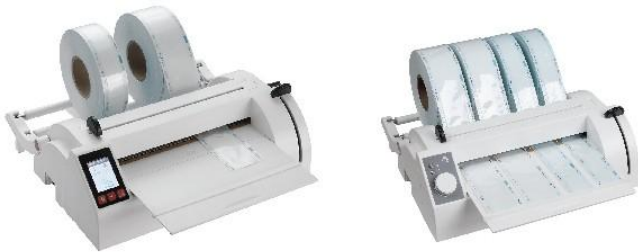

Sealing machine

Power: 500W
Voltage: AC220~240V/50~60Hz
Sealing Width: 300mm (Max)
Rated Temp: 90°C to 210°C
Sealing band height: 12mm
Size: 52*29*21cm
Gross Weight: 8.8KG



RO Water System

Technical Parameters	
Voltage	100-240VAC, 50/60Hz, 25VA
Filter	Sediment
	Precarbon
	R/O Membrane
Purity	≤20μm/cm
Requirements of Tap water	
Water Supply	Tap Water
Water Pressure	>0.1Mpa
Temperature	≤40°C
Ability of Purification	8-12L/h



Suzhou Esco Medical Equipment Co.,Ltd

Esco.company



Suzhou Esco Medical Equipment Co.,Ltd



Steam Generator
Patented design,
high efficiency and reliable



Brass Piping
Withstand high temperature and
pressure, safe and reliable



Safety Valve
Prevent chamber from
over pressure



Air Switch
Shut down the machine in case of
electricity leakage or short circuit



Bacteria Filter
High quality, 2µm precision



Simplicity
– no screw design on the side walls,
elegant and easy to disassemble



Door Handle
Electrical lock+mechanical lock



Solenoid Valves

Effective, Rapid, Dryness, Safety and Versatility



12L

Capacity	12L
Chamber Size	φ20x36cm
Display	LCD
Lock	Electrical + Mechanical
Packing Size	73x57x51 cm
G.W/N.W	59/51KGS
Power	220V/50HZ 2.4KW
Output	USB + Printer
Printer	thermal/stylus



18L

Capacity	18L
Chamber Size	φ25x35cm
Display	LCD
Lock	Electrical + Mechanical
Packing Size	73x57x51 cm
G.W/N.W	61/53KGS
Power	220V/50HZ 2.4KW
Output	USB + Printer
Printer	thermal/stylus



23L

Capacity	23L
Chamber Size	φ25x45cm
Display	LCD
Lock	Electrical + Mechanical
Packing Size	77x57x51 cm
G.W/N.W	63/55KGS
Power	220V/50HZ 2.4KW
Output	USB + Printer
Printer	thermal/stylus